


Polycom SoundStation IP 7000 User Guide

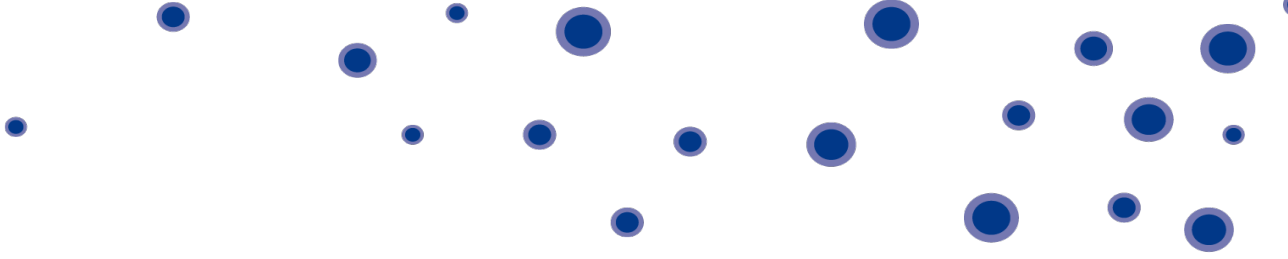

Contents

1.0 Introduction	3
1.1 Parts List	3
2.0 How to set up the Polycom SoundStation IP 7000.....	3
2.1 Installation	3
2.2 External Microphone	3
2.3 Features	4
3.0 Using the Polycom SoundStation IP 7000	4
3.1 Start-up.....	4
3.2 Making a call	4
3.3 Answering a call	4
3.4 Ending a call.....	5
3.5 Muting a call	5
3.5 Place a call on hold	5
3.6 Transferring a call	5
3.6.1 Performing a Consultative Transfer	5
3.6.2 Performing a Blind Transfer	6

1.0 Introduction

This quick start guide will help you to setup your new Polycom SoundStation IP 7000 conference unit on Horizon. For a full user guide, please go to the [Polycom website](#)

1.1 Parts List


The box should include the SoundStation IP 7000, a Polycom quick start guide and a network cable.



2.0 How to set up the Polycom SoundStation IP 7000


2.1 Installation

To install the SoundStation IP 7000, plug one end of the network cable into the network port on the bottom of the SoundStation IP 7000 console and plug the other end of the network cable into your data port with Power over Ethernet (PoE).

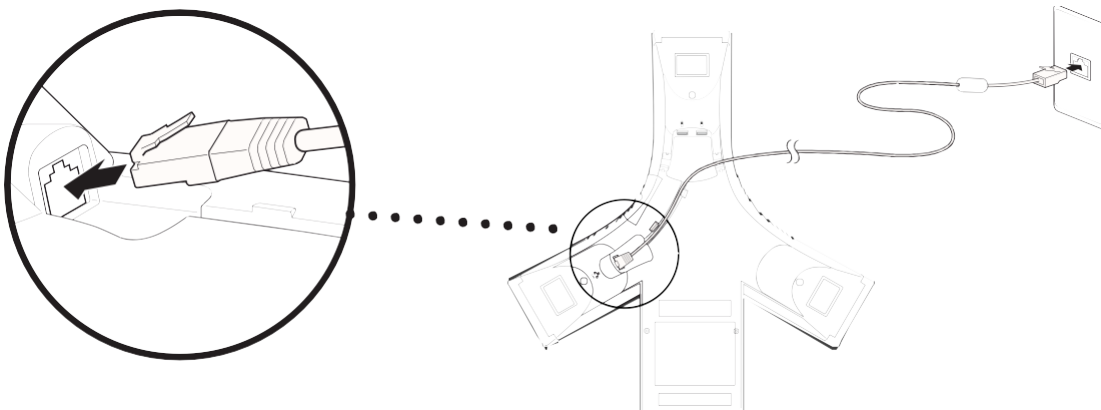


2.2 External Microphone

Connect the external microphones (optional accessory), as shown below.

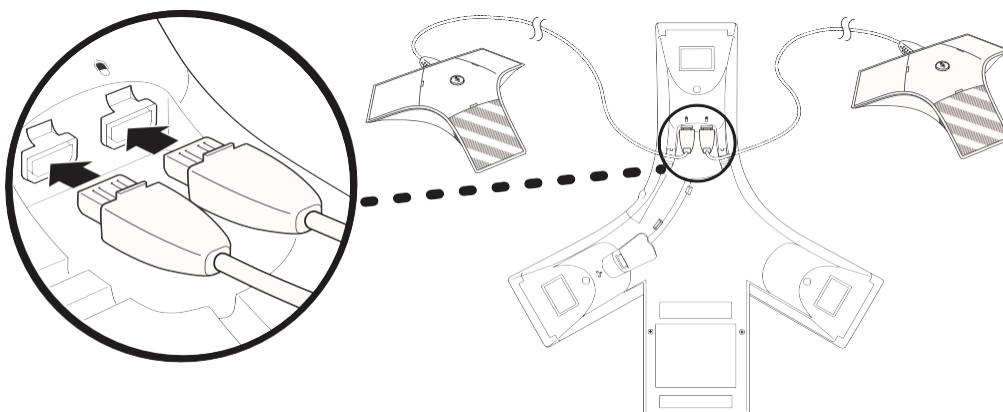

2.3 Features

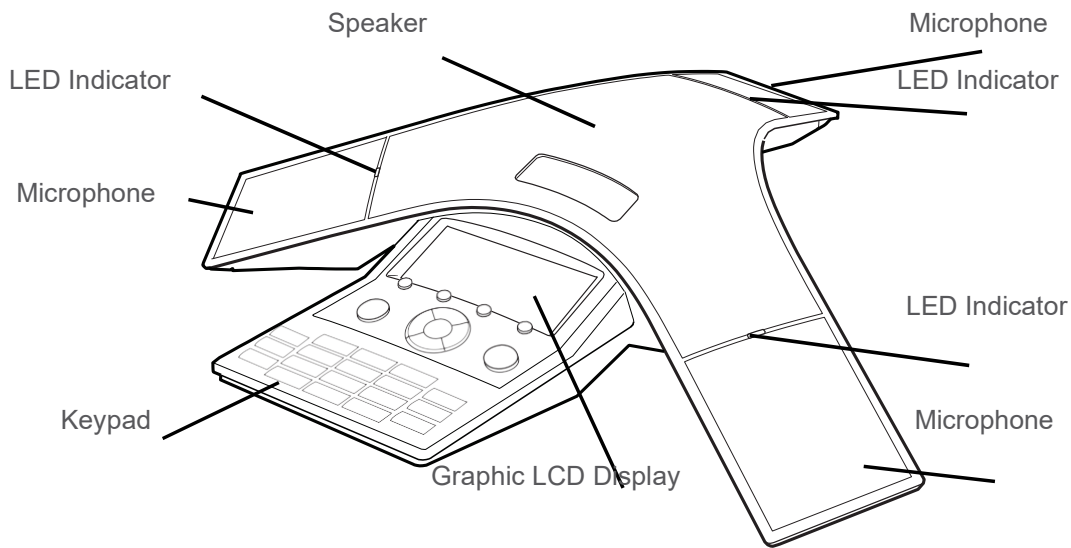


3.0 Using the Polycom SoundStation IP 7000

The features below show the basic functions of the SoundStation IP 7000. Full details are available in the full user guide found on the [Polycom website](#)


3.1 Start-up

After it has been connected to the network, the SoundStation IP 7000 automatically powers up via Power PoE, and begins a process of establishing itself on the network. When this is complete, the Idle screen is displayed as shown below.

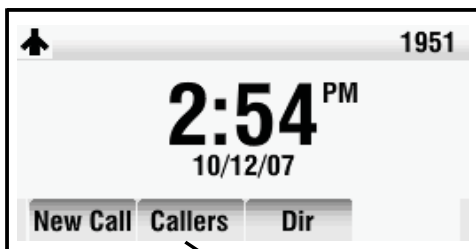


Idle Screen


3.2 Making a call

To place a call without hearing a dial tone, enter the phone number of the party you want to call, and then press  or the Dial soft key.


3.3 Answering a call

Press  or the Answer soft key.

3.4 Ending a call

Press  or the End Call soft key.


3.5 Muting a call

Press  to mute a call. The LEDs glow red to indicate that the other party (or parties) cannot hear you.

You can still hear all other parties while Mute is enabled. To turn mute off, press the same button as before.

3.5 Place a call on hold

During a call, press the Hold soft key. The LEDs blink red to indicate that a call is on hold. The following figure shows James Smith on hold. The Resume soft key now displays on the screen and can be pressed to return to the call.

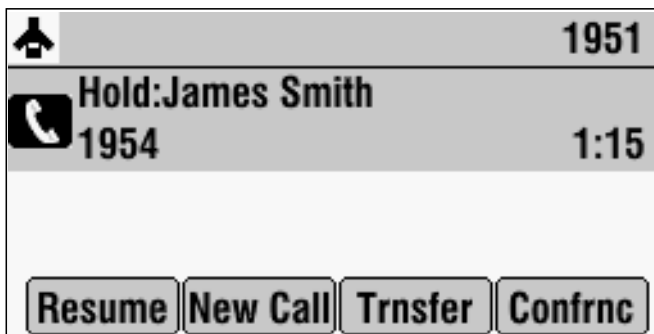

3.6 Transferring a call

3.6.1 Performing a Consultative Transfer

Perform a consultative transfer if you want to talk to the party to whom you are transferring the call. Or, you can choose not to talk to the party. In this case, you wait for the party's ring-back sound, and then transfer the call.

- During a call, press the Transfer soft key. The call is placed on hold. The Transfer to screen displays.



- Place a call to the party to whom you want to transfer the call. See Placing Calls on page 3-2.
- When you hear the ring-back sound, press the Transfer soft key. The transfer is complete. If you want to talk privately to the person to which you are transferring the call before the transfer is complete, wait until the person answers the call, talk to the person, and then press the Transfer soft key.


You can cancel the transfer before the call connects by pressing the Cancel soft key.

3.6.2 Performing a Blind Transfer

When you use a blind transfer, you transfer a call without speaking to the party to whom you are transferring the call. The call is automatically transferred as soon as you dial the party's number.

To perform a blind transfer:

- During a call, press the Transfer soft key. The Transfer to screen displays, with the Blind soft key.

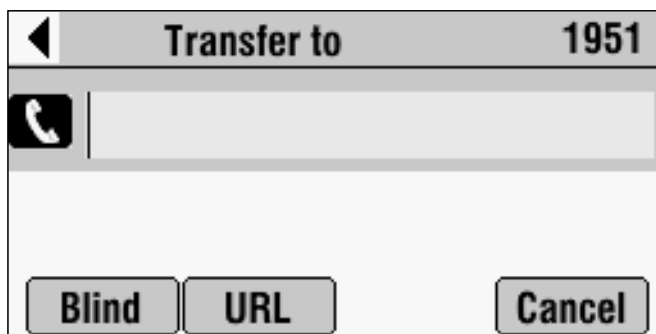

- Press the Blind soft key.
- The Transfer to screen displays.
- Place a call to the party to whom you want to transfer the call. See Placing Calls on page 3-2.

The call automatically transfers to the party you specified.